































### **Features**

- Ultra slim design with 52.5mm(3SU) width
- Universal input 85~264VAC(277VAC operational)
- No load power consumption<0.3W</li>
- Isolation class  ${\mathbb I}$
- · Pass LPS (Limited power source)
- DC output voltage adjustable
- · Protections : Short circuit / Overload / Over voltage
- Cooling by free air convection (working temperature:-30~+70°C)
- DIN rail TS-35/7.5 or 15 mountable
- Over voltage category III
- · LED indicator for power on
- 3 years warranty

# Applications


- · Household control system
- Building automation
- · Industrial control system
- Factory automation
- · Electro-mechanical apparatus

#### Description

HDR-60 is one economical ultra slim 60W DIN rail power supply series, adapt to be installed on TS-35/7.5 or TS-35/15 mounting rails. The body is designed 52.5mm(3SU) in width, which allows space saving inside the cabinets. The entire series adopts the full range AC input from 85VAC to 264VAC (277VAC operational) and conforms to EN61000-3-2, the norm the European Union regulates for harmonic current.

HDR-60 is designed with plastic housing that it can effectively prevent user from electric hazards. With working efficiency up to 91%, the entire series can operate at the ambient temperature between -30°C and 70°C under air convection. The complete protection functions and relevant certificates for home automations and industrial control apparatus (IEC62368-1,UL508,UL62368-1,EN61558-2-16) make HDR-60 a very competitive power supply solution for household and industrial applications.

## Model Encoding






60W Ultra Slim Step Shape DIN Rail

#### **SPECIFICATION**

MODEL		HDR-60-5	HDR-60-12	HDR-60-15	HDR-60-24	HDR-60-48		
	DC VOLTAGE	5V	12V	15V	24V	48V		
	RATED CURRENT	6.5A	4.5A	4A	2.5A	1.25A		
	CURRENT RANGE	0 ~ 6.5A	0 ~ 4.5A	0 ~ 4A	0 ~ 2.5A	0 ~ 1.25A		
	RATED POWER	32.5W	54W	60W	60W	60W		
	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	120mVp-p	150mVp-p	240mVp-p		
DUTPUT	VOLTAGE ADJ. RANGE	5.0 ~ 5.5V	10.8 ~ 13.8V	13.5 ~ 18V	21.6 ~ 29V	43.2 ~ 55.2V		
	VOLTAGE TOLERANCE Note.3	±2.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	LOAD REGULATION	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%		
	SETUP, RISE TIME	500ms, 50ms/230VAC	500ms, 50ms/115VAC	at full load				
	HOLD UP TIME (Typ.)	30ms/230VAC 12ms/115VAC at full load						
	VOLTAGE RANGE	85 ~ 264VAC (277VAC operational ) 120 ~ 370VDC (390VDC operational )						
	FREQUENCY RANGE	47 ~ 63Hz						
NPUT	EFFICIENCY (Typ.)	85%	88%	89%	90%	91%		
	AC CURRENT (Typ.)	1.2A/115VAC 0.8A/2	30VAC					
	INRUSH CURRENT (Typ.)	COLD START 30A/115VAC 60A/230VAC						
		105 ~ 160% rated output r	05 ~ 160% rated output power					
	OVERLOAD  OVER VOLTAGE	Hiccup mode when output voltage <50%, recovers automatically after fault condition is removed						
			•	· · · · · · · · · · · · · · · · · · ·		ter fault condition is removed		
PROTECTION		5.75 ~ 6.75V	14.2 ~ 16.2V	18.8 ~ 22.5V	30 ~ 36V	56.5 ~ 64.8V		
		Protection type : Shut dow	n o/p voltage, re-power o	n to recover				
	WORKING TEMP.	-30 ~ +70°C (Refer to "Derating Curve")						
	WORKING HUMIDITY	20 ~ 90% RH non-conden						
NVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C , 10 ~ 95% RH non-condensing						
	TEMP. COEFFICIENT	$\pm 0.03\%$ °C (0 ~ 50°C) RH non-condensing						
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes; Mounting: Compliance to IEC60068-2-6						
	OPERATING ALTITUDE	2000 meters						
	OVER VOLTAGE CATEGORY	III ; According to EN61558, EN50178, EN60664-1, EN62477-1; altitude up to 2000 meters						
	SAFETY STANDARDS	UL62368-1, UL508, TUV EN61558-2-16, IEC62368-1, EAC TP TC 004, BSMI CNS14336-1 approved; Design refer to EN62368-1						
	WITHSTAND VOLTAGE	I/P-O/P:4KVAC	·			· •		
	ISOLATION RESISTANCE	I/P-O/P:100M Ohms / 500	VDC / 25°C / 70% RH					
	EMC EMISSION	Parameter	Standard		Test Level / No	te		
		Conducted	EN55032(CIS	SPR32), CNS13438	Class B			
SAFETY & EMC (Note 4)		Radiated	EN55032(CIS	SPR32), CNS13438	Class B			
		Harmonic Current	EN61000-3-2		Class A			
		Voltage Flicker	EN61000-3-3					
		EN55024, EN55035. EN61000-6-2. EN61204-3						
	EMC IMMUNITY	Parameter	Standard		Test Level /No	te		
		ESD	EN61000-4-2		Level 3, 8KV a	ir; Level 2, 4KV contact, criteria		
		Radiated Susceptibility	EN61000-4-3		Level 3, criteria A			
		EFT/Burest	EN61000-4-4		Level 3, criteria A			
		Surge	EN61000-4-5		-	Level 4,2KV/L-N, criteria A		
		Conducted	EN61000-4-6			Level 3, criteria A		
		Magnetic Field	EN61000-4-8		-	Level 4. criteria A		
		Voltage Dips and interrup				>95% dip 0. 5 periods, 30% dip 25 periods, >95% interruptions 250 periods		
OTHERS	MTBF	927.6K hrs min. MIL-HDBK-217F (25°C)						
	DIMENSION	52.5*90*54.5mm (W*H*D)						
	PACKING	190g;60pcs/12.4Kg/0.97CUFT						
NOTE	<ol> <li>All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.</li> <li>Ripple &amp; noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1μf &amp; 47μf parallel capacitor.</li> <li>Tolerance: includes set up tolerance, line regulation and load regulation.</li> <li>The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com)</li> <li>The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500m)</li> </ol>							




#### ■ Block Diagram

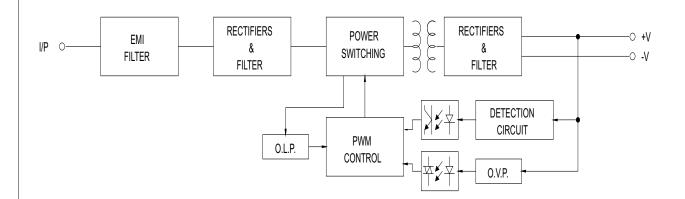

#### ■ Derating Curve

# 100 80 60 50 40 20 30 0 10 20 30 40 50 60 70 (VERTICAL) AMBIENT TEMPERATURE (°C)


#### ■ Output Derating VS Input Voltage

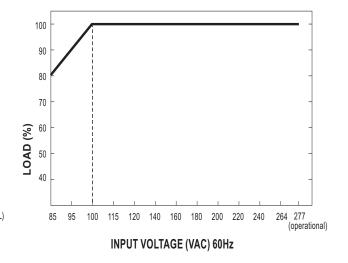





#### ■ Mechanical Specification

(Unit: mm, tolerance ± 0.5mm)

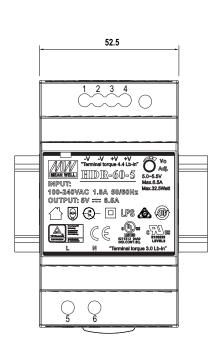

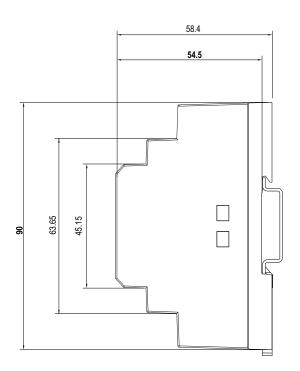



ADMISSIBLE DIN-RAIL:TS35/7.5 OR TS35/15

Terminal Pin No. Assignment

3							
Pin No.	Assignment	Pin No.	Assignment				
1,2	-V	5	AC/L				
3,4	+V	6	AC/N				

#### ■ Installation Manual

Please refer to : http://www.meanwell.com/manual.html