

SPECIFICATION




■ Features :

- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor \ge 94%
- Protections:Short circuit / Overload / Over voltage
- Forced air cooling by built-in DC fan
- With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +3.3V
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- 2 years warranty




MODEL		IPC-300A								
	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	STANDBY			
ОИТРИТ	DC VOLTAGE	3.3V	5V	12V	-5V	-12V	5VSB			
	RATED CURRENT	20A	30A	18A	0.5A	1A	2A			
	CURRENT RANGE	0 ~ 20A	1 ~ 30A	1 ~ 18A	0 ~ 0.5A	0.1 ~ 1A	0 ~ 2A			
	RATED POWER	300W continue. +5V,+3.3V,+12V combine total power output shall not exceed 270W.(The +5 & +3.3Volt combine total output shall not exceed 15 (The -5 & -12Volt combine total output shall not exceed 12W)								
	RIPPLE & NOISE (max.) Note.2									
	VOLTAGE ADJ. RANGE	CH2:5.05~5.5V								
	VOLTAGE TOLERANCE Note.3		±5.0%	±7.0%	±8.0%	±10%	±5.0%			
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±2.0%	±2.0%	±1.0%			
	LOAD REGULATION	±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%			
	SETUP, RISE TIME	800ms, 20ms/230VA		ns/115VAC at full loa		- 1070	20.070			
	HOLD TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load								
	VOLTAGE RANGE	90 ~ 264VAC								
	FREQUENCY RANGE	90 ~ 204 VAC 47 ~ 63Hz								
INPUT	EFFICIENCY (Typ.)	75%								
	AC CURRENT (Typ.)	4.6A/115VAC 2.3A/230VAC								
	INRUSH CURRENT (Typ.)	40A/115VAC 80A/230VAC								
	LEAKAGE CURRENT(max.)	3mA/240VAC								
	OVER LOAD	105 ~ 150% rated output power Protection type : Shut down o/p voltage, re-power on to recover								
		+3.3V, +5V: 110% ~ 140% of rated voltage; +12V:13.2V ~ 16V								
PROTECTION	OVER VOLTAGE	Protection type: Shut down o/p voltage, re-power on to recover								
		All output equipped with short circuit								
	SHORT CIRCUIT	Protection type: Shut down o/p voltage, re-power on to recover								
FUNCTION	POWER GOOD SIGNAL	The TTL compatible signal out with 100ms to 500ms delay after power set up								
	POWER FAIL SIGNAL	The TTL compatible signal will go down at least 1ms before +5V below 4.75V								
	PS-ON INPUT SIGNAL	Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V"								
	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")								
	WORKING HUMIDITY	20 ~ 90% RH non-condensing								
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +85°C 10 ~ 95% RH								
	TEMP. COEFFICIENT	±0.05% / °C (0 ~ 50°C)								
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes								
SAFETY &	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved								
	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:2KVAC								
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:50M Ohms / 500VDC / 25°C / 70% RH								
(Note 4)	EMC EMISSION	Compliance to EN55022 (CISPR22) Class B, Design refer to FCC part 15 Class B, EN61000-3-2,-3								
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4, 5,6,8,11, light industry level, criteria A								
	MTBF	94.1K hrs min. MIL-HDBK-217F (25°C)								
		ATX main power connector * 1ea; +12V power connector * 1ea								
OTHERS	CONNECTOR	Peripheral power connector * 3ea; Floppy drive power connector * 1ea								
	COOLING	Forced air ventilation by 4cm DC fan								
	DIMENSION	260*83*40mm (L*W*H)								
	PACKING	1.46Kg: 10pcs/15.6Kg/0.89CUFT								
NOTE	. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 1. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 1. Load regulation is measured from 20% to 100% max. Load. 1. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to EMI testing of component power supplies. (as available on http://www.meanwell.com) 1. Derating may be needed under low input voltages. Please check the derating curve for more details.									
				<u> </u>		File Name	IPC-300A-SPEC 2013-12			



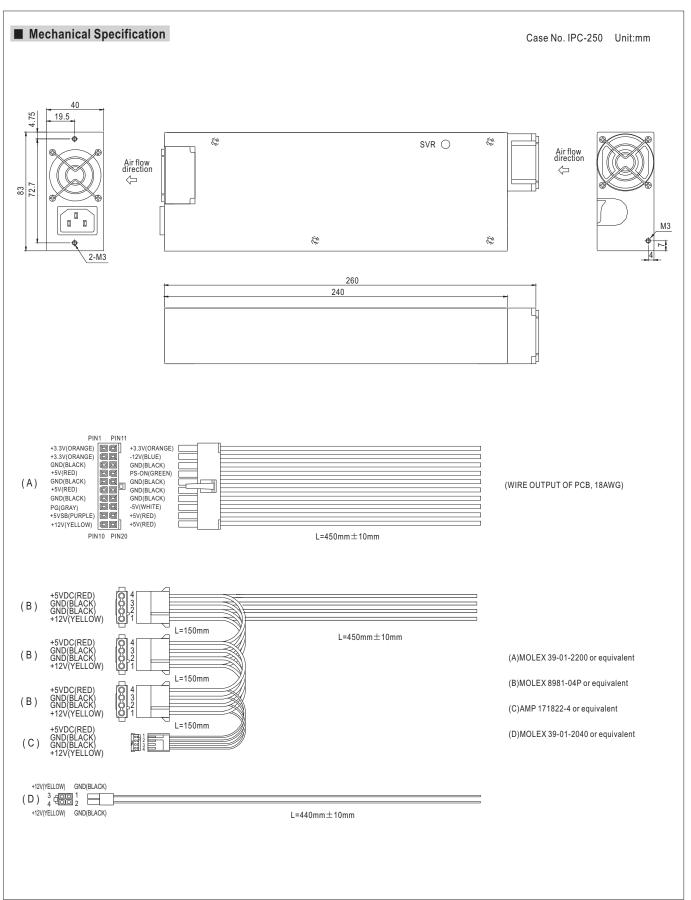



■ Block Diagram

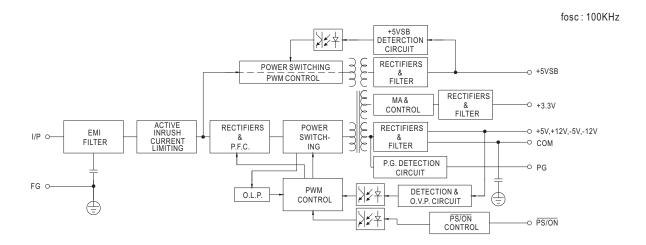

■ Derating Curve

100

80

60

40

20

-10


LOAD (%)

70 (HORIZONTAL)



50

■ Output Derating VS Input Voltage

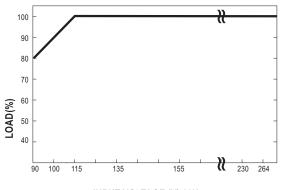

INPUT VOLTAGE (V) 60Hz



SPECIFICATION



■ Features :

- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor ≥94%
- Protections: Short circuit / Overload / Over voltage
- Forced air cooling by built-in DC fan
- With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +24V
- 24V/3A output an peak 7A for 30sec.(max.)
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- 2 years warranty






MODEL		IPC-300									
	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	STANDBY				
ОИТРИТ	DC VOLTAGE	24V	5V	12V	-5V	-12V	5VSB				
	RATED CURRENT	3A	30A	18A	0.5A	1A	2A				
	CURRENT RANGE	0 ~ 7A	1 ~ 30A	1 ~ 18A	0 ~ 0.5A	0.1 ~ 1A	0 ~ 2A				
	RATED POWER	300W continue. +24V,+ (The -5 & -12Volt com		ot exceed 270W.(The +24	4 & +5Volt combine total	output shall not exceed 150					
	RIPPLE & NOISE (max.) Note.2	`	50mVp-p	120mVp-p	100mVp-p	120mVp-p	50mVp-p				
	VOLTAGE ADJ. RANGE	CH2: 5.05 ~ 5.5V	301117 р-р	1201117ρ-ρ	TOOTHV p-p	120111V p-p	обшур-р				
	VOLTAGE ADS. RANGE VOLTAGE TOLERANCE Note.3		±5.0%	±7.0%	±8.0%	±10%	±5.0%				
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±2.0%	±2.0%	±1.0%				
	LOAD REGULATION	±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%				
	SETUP, RISE TIME	800ms, 20ms/230VAC 2500ms, 20ms/115VAC at full load									
		16ms/230VAC 16ms/115VAC at full load									
	HOLD UP TIME (Typ.)										
	VOLTAGE RANGE	90 ~ 264VAC									
	FREQUENCY RANGE	47 ~ 63Hz									
INPUT	EFFICIENCY (Typ.)	80%									
	AC CURRENT (Typ.)	4.6A/115VAC 2.3A/230VAC									
	INRUSH CURRENT (Typ.)	40A/115VAC 80A/230VAC									
	LEAKAGE CURRENT(max.)	3mA/240VAC									
	OVERLOAD	105 ~ 150% rated output power Protection type: Shut down o/p voltage, re-power on to recover									
	OVER VOLTAGE	+24V, +5V: 110% ~ 140% of rated voltage; +12V:13.2V ~ 16V									
PROTECTION		Protection type: Shut down o/p voltage, re-power on to recover									
		All output equipped with short circuit									
	SHORT CIRCUIT	Protection type: Shut down o/p voltage, re-power on to recover									
FUNCTION	POWER GOOD SIGNAL	The TTL compatible signal out with 100ms to 500ms delay after power set up									
	POWER FAIL SIGNAL	The TTL compatible signal will go down at least 1ms before +5V below 4.75V									
	PS-ON INPUT SIGNAL	Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V"									
	WORKING TEMP.	-10 ~ +60°C (Refer to "Derating Curve")									
	WORKING HUMIDITY	20 ~ 90% RH non-condensing									
ENVIRONMENT	STORAGE TEMP., HUMIDITY	20 ~ 90% RH non-condensing -40 ~ +85°C 10 ~ 95% RH									
	TEMP. COEFFICIENT	±0.05% / °C (0~50°C)									
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes									
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved									
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:2KVAC									
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:50M Ohms / 500VDC / 25°C / 70% RH									
(Note 4)	EMC EMISSION	Compliance to EN55022 (CISPR22) Class B, Design refer to FCC part 15 Class B, EN61000-3-2,-3									
(EMC IMMUNITY	Compliance to EN61000-4-2,3,4, 5,6,8,11, light industry level, criteria A									
OTHERS	MTBF										
	MIDE	94.1K hrs min. MIL-HDBK-217F (25°C) ATX main power connector * 1ea; +12V power connector * 1ea									
	CONNECTOR	Peripheral power connector * 3 ea; Floppy drive power connector * 1 ea									
	2001 INO										
	COOLING	Forced air ventilatio	,								
	DIMENSION	260*83*40mm (L*W*H) 1.46Kg; 10pcs/15.6Kg/0.89CUFT									
	PACKING	0	-		=0.00						
NOTE	 All parameters NOT specia Ripple & noise are measur Load regulation is measure The power supply is consic EMC directives. For guidar (as available on http://www 	ed at 20MHz of band ed from 20% to 100% dered a component w nce on how to perform	width by using a 12 max. Load. hich will be installed	" twisted pair-wire d into a final equipr	terminated with a 0.10 ment. The final equipn	uf & 47uf parallel cap nent must be re-confi					


- (as available on http://www.meanwell.com)
- 5. Derating may be needed under low input voltages. Please check the derating curve for more details.



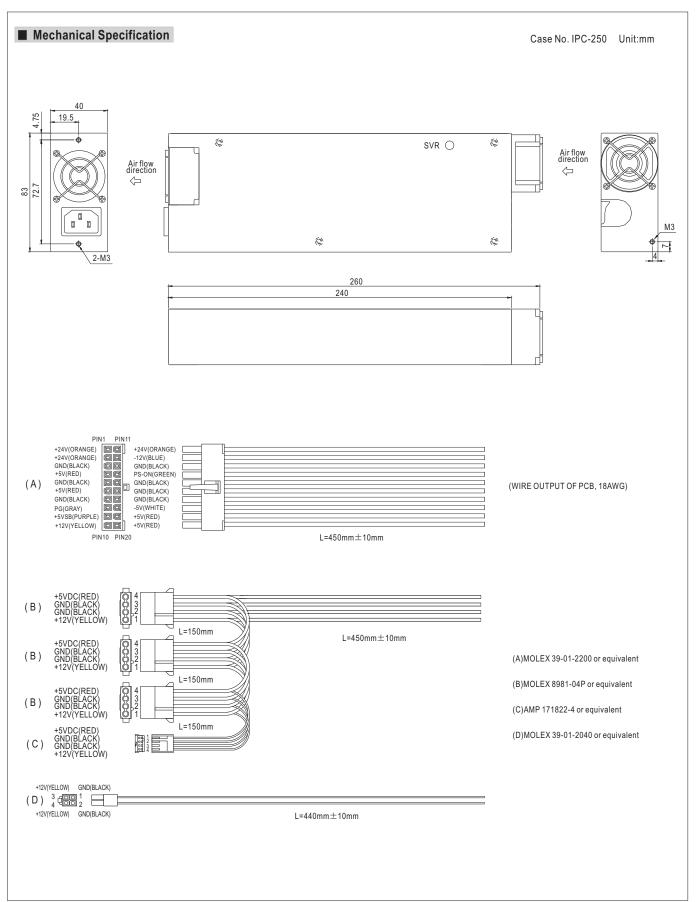



■ Block Diagram

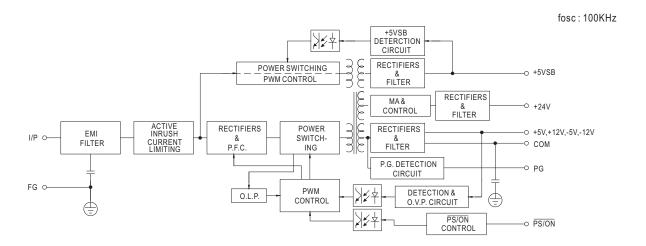

■ Derating Curve

■ Output Derating VS Input Voltage

